


Side-Mounted Vertical Lift Tractor Mower DL-22 V2


for Farmall D-212 and D-217 tractors

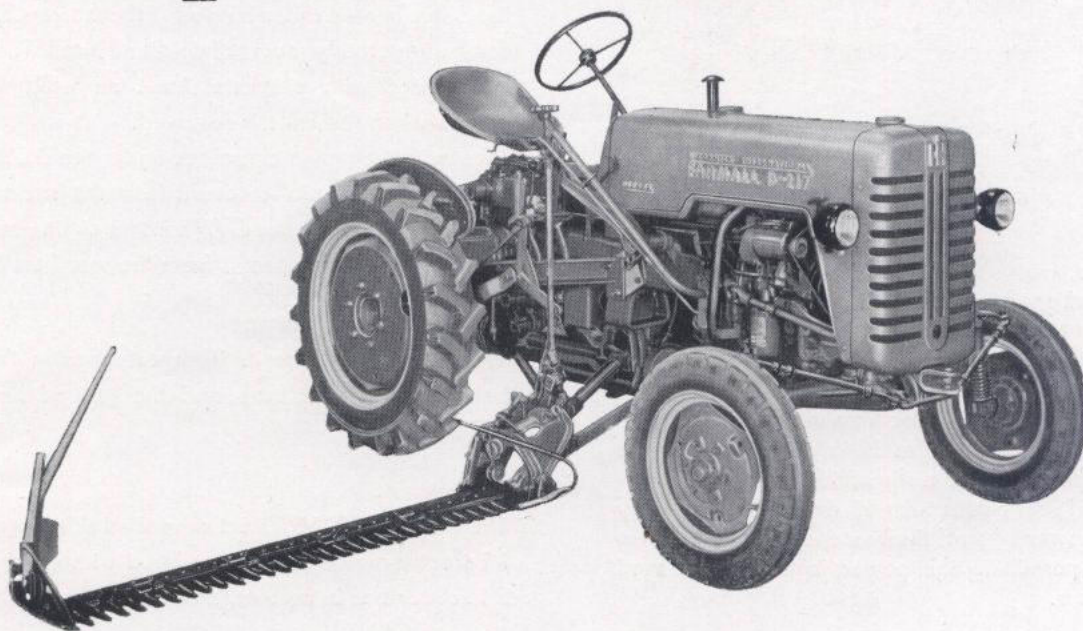

Meets every requirement . . .


- The cutter bar can be raised to plain lift or vertical lift position from the tractor seat.
- The mower drive stops automatically when the cutter bar is raised above plain lift position.
- The tilt of the cutter bar is adjusted from the tractor seat.
- Thanks to ample ground clearance it is not necessary to remove the mower when plowing or doing other field works
- Its simple construction makes it easy to mount.

McCORMICK cutter bars are unexcelled.

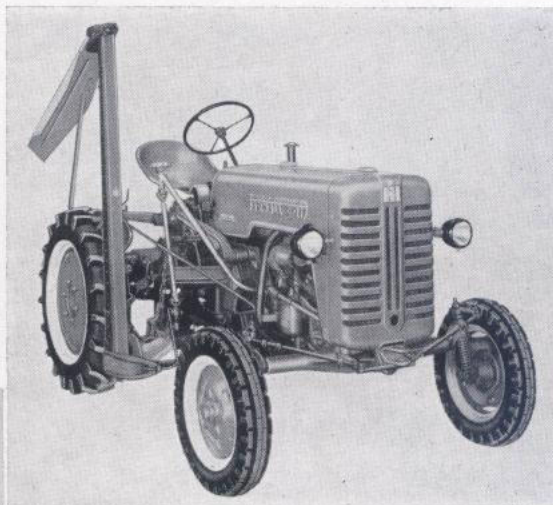

Full vertical lift


The cutter bar is raised and lowered by means of a conveniently located hand lever. A heavy assistance spring makes it easy to operate the hand lever. There are three notches in the lifting quadrant for locking the mower bar in the working position, plain or vertical lift positions.

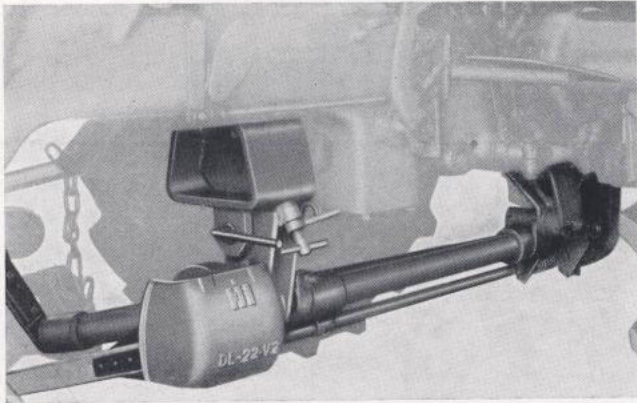

Mower drive

The power to operate the DL-22 V2 mower is taken from the power take-off shaft by means of two V-belts. In lowering the cutter bar a tensioning roller tightens the V-belts and on reaching the plain lift position the knife starts automatically. Transmission of power is interrupted by means of V-belts ejectors, and the reciprocating motion of the knife is stopped. The tensioning roller is so designed that the V-belts act simultaneously as a slip clutch.

The V-belt guard and power take-off drive pulley are easy to detach. The power take-off shaft extends through the drive pulley thereby permitting the power take-off to be used for other purposes.

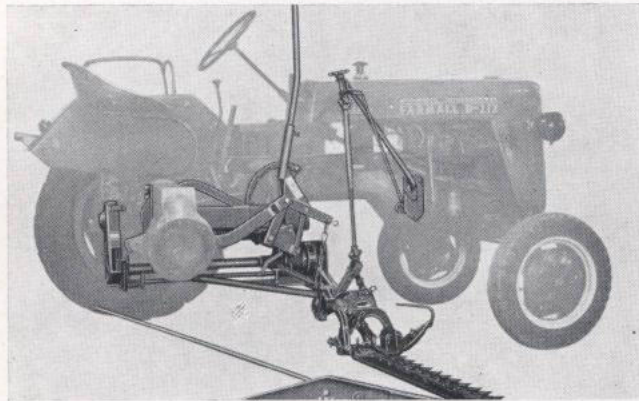

Hand lift:

Where hydraulic power is not available, a very easily operated manual control lever is supplied. Notches on the quadrant of the lifting lever permit the cutter bar to be held in either the plain or vertical lift position.

Easy to attach and detach

The mower is quickly mounted to the tractor by means of hitch pins and spring cotters. The cutter bar with coupling and pitman and the mower drive can be attached and detached in a matter of minutes whereby the pitman need not be detached from the flywheel wrist pin. Furthermore, the cutter bar with shoe hinge and the mower drive assembly can be separately mounted or dismounted. The shoe hinge is provided with a special hook on which to hang the pitman when the knife is removed.


Thanks to the ample clearance under the DL-22 V2 mower it is not necessary to remove it from the tractor when other field work is performed. When the cutting season is over it is advisable to protect it from the weather.

High ground clearance

With the cutter bar in transport position the clearance between the inner shoe and the ground amounts to 12 inches.

Equipment

The model DL-22 V2 direct connected side-mounted vertical lift tractor mower may be ordered with either a 4½ ft. or 5 ft. cutter bar in regular, medium, or low-cut version.

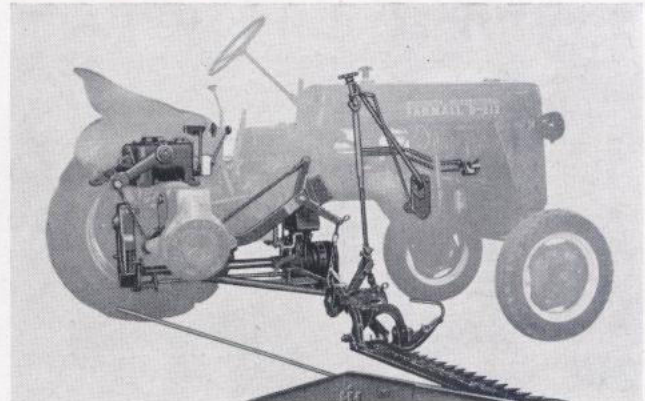

Hydraulic lift:

The hydraulic lift provides complete and instantaneous control of the cutter bar. The hydraulic control lever is conveniently located to the tractor operator's right hand.



INTERNATIONAL HARVESTER COMPANY M.B.H.

Neuss/Rhine

(Germany)