



# MCCORMICK *Front Loader*

INTERNATIONAL

for Farmall D-320, D-324 and D-430 Tractors

BAAS SYSTEM


- Payload of 900 pounds
- Height of lift 103"
- Quick attaching hydraulic hose couplings
- Quick attachability and detachability
- Does not interfere with sidemounted mower
- Radiator Grill Guard
- Tubular Steel booms for extra strength



The McCormick-International Front Loader is a simple, rugged, quick-attachable power loader for Farmall D-320, D-324, and D-430 tractors, with a pay load capacity of approximately 900 pounds. The husky, all-welded mounting frame holds the

loader solidly to the tractor. Heavy, powerful tubular steel booms assure long and trouble-free life under the toughest of conditions. Extra strong cross and diagonal braces keep sway and twist to a minimum.

The Front Loader is hydraulically operated. The big 3.4 gallon capacity reservoir of the tractor hydraulic system is more than ample to assure proper operation without overheating of the hydraulic oil. Rugged, single-acting lifting cylinders with chrome plated piston rods and leak-tight seals guarantee fast, dependable lifting.

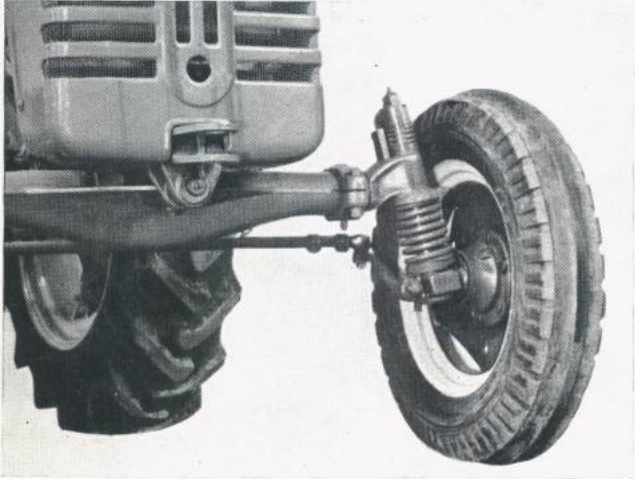


The Front Loader can also be used on tractors equipped with spring mounted front axles without any modification to the axles.




A heavy duty guard extends beyond the grill and protects it from damage.

The Bucket release lever is within easy reach.

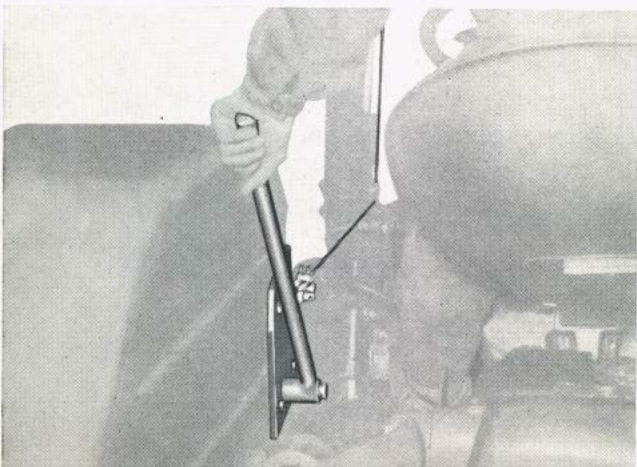


The McCormick-International Front Loader is designed for quick attachability and detachability. The booms hook under 2 pivot pins on the mounting frame and are supported by the hydraulic cylinders which are attached to mounting frame pivot pins. One of the outstanding features of this Front Loader is that it does not interfere with the mounting or functioning of mid- or rear-mounted Neuss made implements.

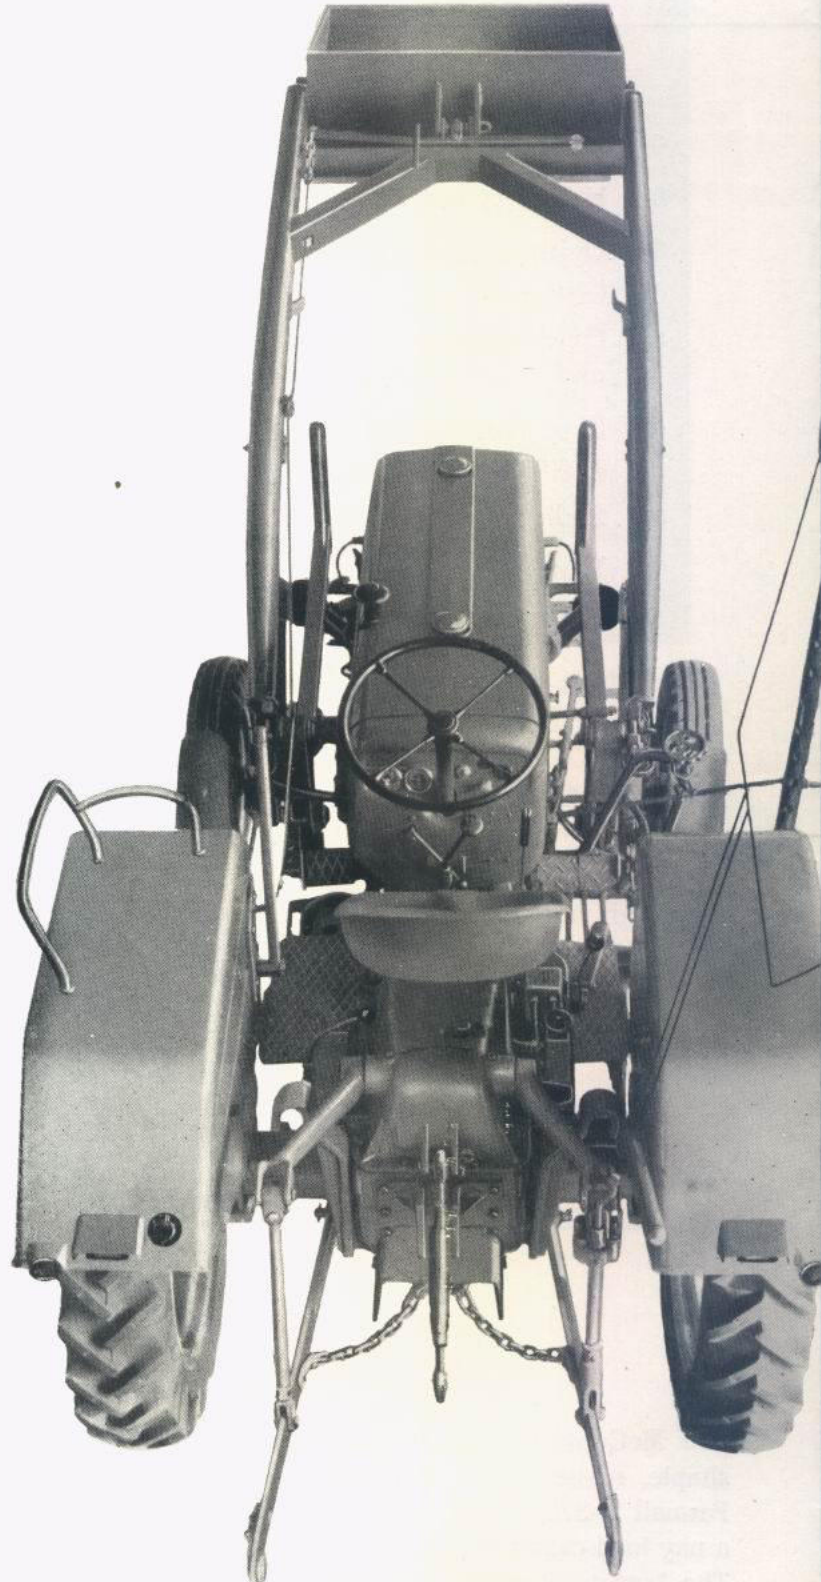


The operator has full control over his unit from the tractor seat. The bucket release is just to the left and the hydraulic controls just to the right of the tractor seat.

The right equipment for practically any job is available. It comprises a range of easy to attach, heavy duty loading and digging equipment, including shovel, manure fork, root bucket, crane attachment, etc. A radiator grill guard is supplied as regular equipment.


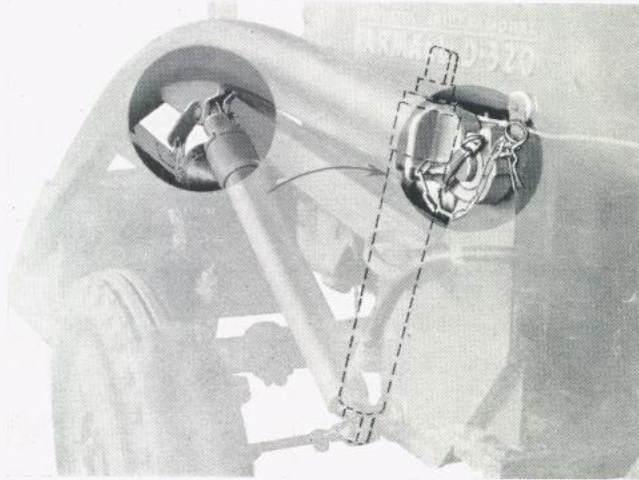


The hydraulic cylinders can be left in position, when the booms are removed, by folding the cylinders back to the position indicated above and securing them with straps.

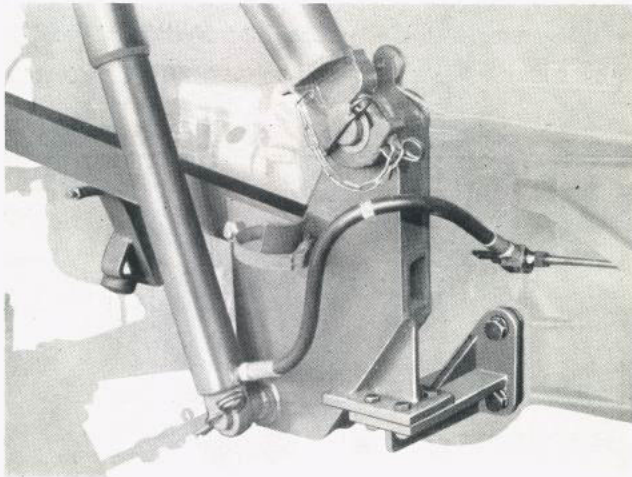


A single quick attachable mounting bracket on each side carries the boom pivot pins and hydraulic cylinder pivots.

The hydraulic control valve is positioned so that the hand drops naturally on to the lever knob.

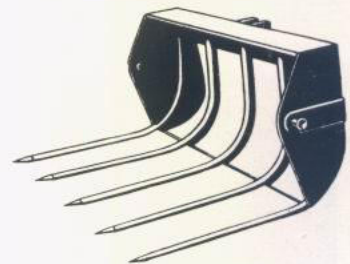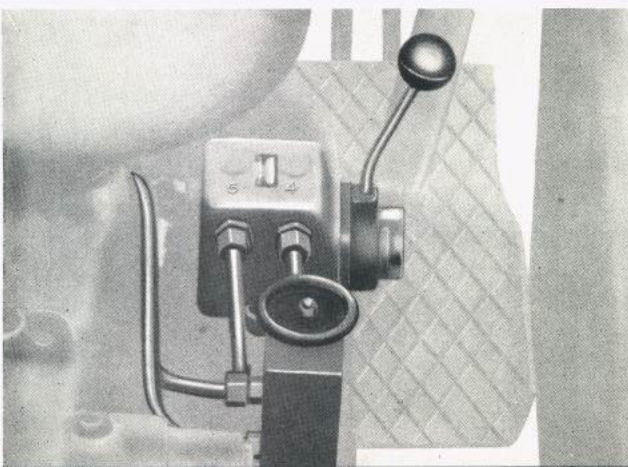


MANURE FORK

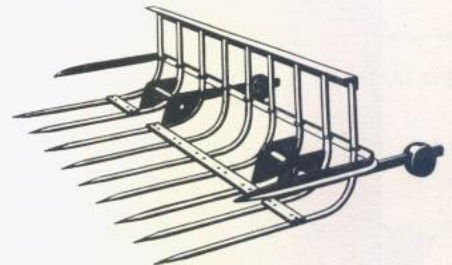


HAY FORK



SHOVEL

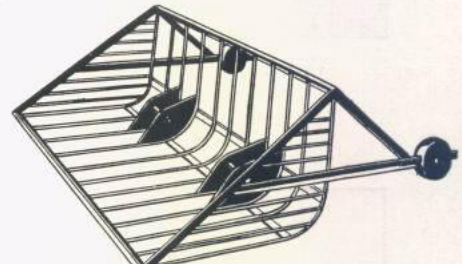

ROOT BUCKET

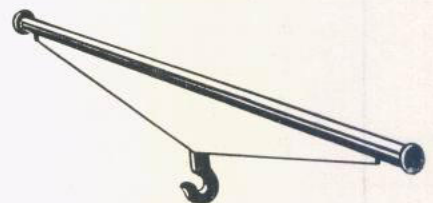


LOADING HOOK



CRANE ATTACHMENT



BOOM EXTENSION

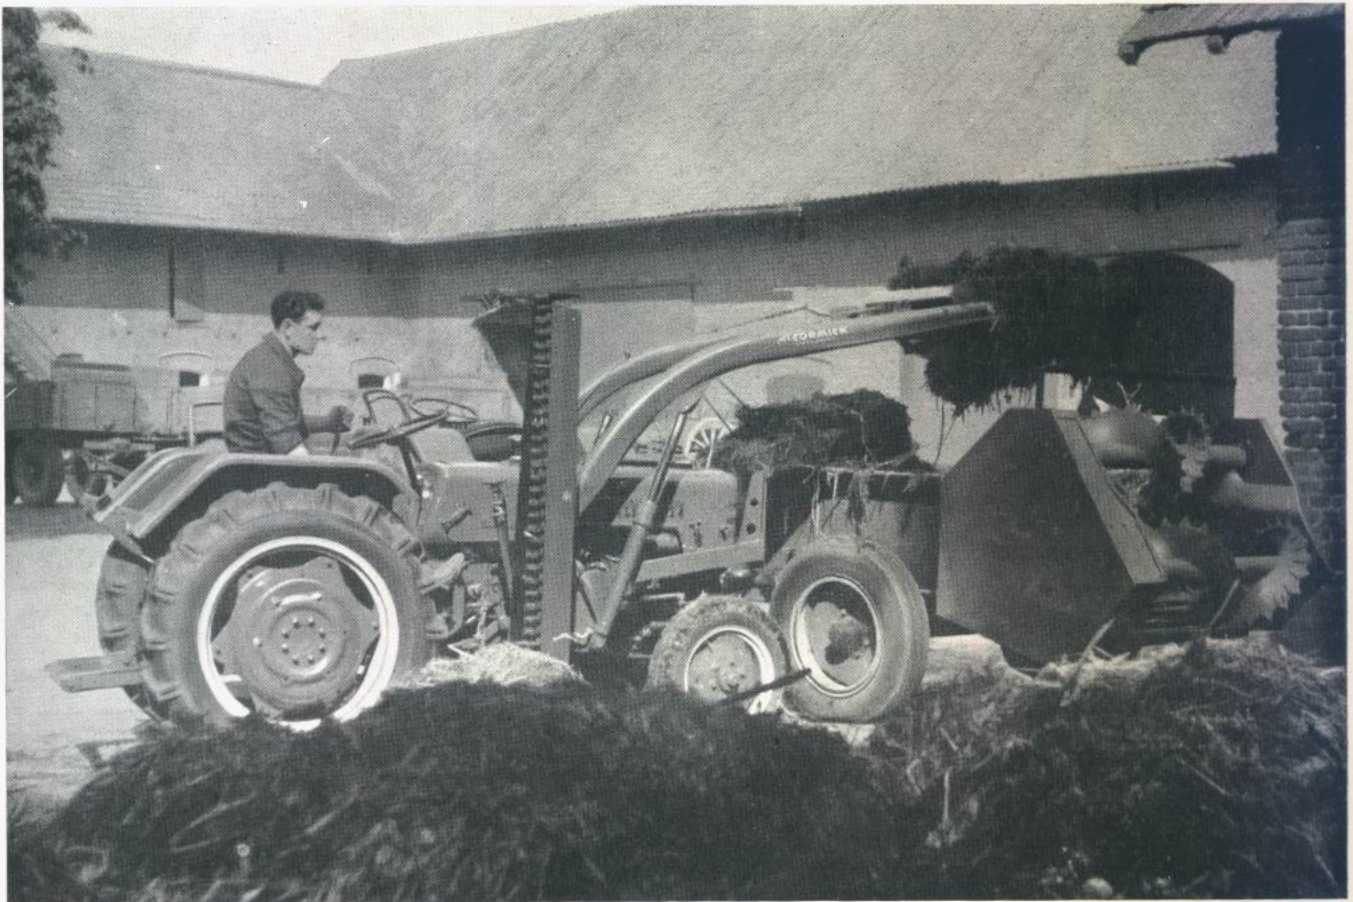

The side-mounted mower need not be removed when working with the McCormick-International Front Loader.

### Specifications

Pay load, approximately . . . . .	900 lbs
Maximum lift to pivot point of bucket . . . . .	103"
Capacity of bucket . . . . .	5.3 cu. ft.
Bucket clearance when dumping . . . . .	79"
Boom cylinder size	
Diameter . . . . .	2"
Stroke . . . . .	17 <sup>5</sup> / <sub>16</sub> "



**INTERNATIONAL HARVESTER COMPANY M. B. H.**  
 NEUSS/RHINE GERMANY